

Diesel Locomotive

OPERATOR'S MANUAL



Compatibility

This engine will operate on any traditional O-31 Gauge track system, including M.T.H.'s RealTrax[®] or ScaleTrax[™] or traditional tubular track. It is also compatible with most standard AC transformers. (See page 15 for a complete list of compatible transformers and wiring instructions.)



PLEASE READ BEFORE USE AND SAVE

Table of Contents

| Set Up Ch | ecklis t | 3 |
|-----------|--|----|
| I | Lubrication | 3 |
| Basic Ope | ration | 4 |
| A | Activating Features | 4 |
| Configuri | ng For Display | 5 |
| Loco-Sour | nd Operating Instructions | 6 |
| A | Activating Loco-Sound Features | 6 |
| S | Speed Control | 7 |
| | Locking Locomotive Into A Direction | |
| | Jsing Proto-Cast and Proto-Dispatch Features | |
| Maintenai | nce | 9 |
| I | ubricating and Greasing Instructions | 9 |
| (| Cleaning The Wheels, Tires and Track | 10 |
| Т | Fraction Tire Replacement Instructions | 11 |
| | Headlight Replacement Instructions | |
| Т | Froubleshooting Loco-Sound Problems | 13 |
| | Transformer Compatibility and Wiring Chart | |
| | Service & Warranty Information. | |
| | Limited One-Year Warranty | |
| _ | · · · · · · · · · · · · · · · · · · · | 0 |

CAUTION: ELECTRICALLY OPERATED PRODUCT:
Not recommended for children under 10 years of age. M.T.H. recommends adult supervision with children ages 10 - 16.
As with all electric products, precautions should be observed during handling and use to reduce the risk of electric shock.

 $\textbf{WARNING:} \ When using electrical products, basic safety precautions should be observed, including the following: \\$

- Read this manual thoroughly before using this device.

 M.T.H. recommends that all users and persons supervising use examine the hobby transformer and other electronic equipment periodically for conditions that may result in the risk of fire, electric shock, or injury to persons, such as damage to the primary cord, plug blades, housing, output jacks or other parts. In the event such conditions exist, the train set should not be used until properly repaired.

 Do not operate your layout unattended. Obstructed accessories or stalled trains may overheat, resulting in damage to your layout.

 This train set is intended for indoor use. Do not use if water is present. Serious injury or fatality may result.

 Do not operate the hobby transformer with damaged cord, plug, switches, buttons or case.

Set Up Checklist

- Lubricate the locomotive
- Apply power to run as described in the Basic Operating Section of this manual

Lubrication



You should lubricate the engine to prevent it from squeaking. Use light household oil and follow the lubrication points marked "L" in Fig. 1. Do not over-oil. Use only a drop or two on each pivot point.



Figure 1. Lubrication Points on the Locomotive

Basic Operation

The Throttle knob controls how fast your train will travel.

Turn the throttle knob up ½-way, until the engine and caboose lights shine bright.

Put the engine into motion by pressing the Direction button on your transformer once. (hold it for approximately 1 second)

If the engine does not begin to move as soon as you firmly press the Direction button, you may not have sent enough voltage to the track to make the train move. Turn the throttle up a bit higher until the train begins to move.

Activating Features


Throttle To increase or decrease track voltage, and therefore train speed, turn the throttle control knob. Turning clockwise will increase voltage and speed, while turning counterclockwise will decrease voltage and speed. The engine will maintain the speed you set after you release the throttle until you turn it again to change the voltage and speed.

Bell - To sound the bell, in an engine equipped with a bell firmly press and release the Bell button. To turn the bell off, press and release the Bell button again. The bell will continue to ring from the time you turn it on until you press and release the button again to turn it off.

Horn/Whistle - To sound the whistle, firmly press the Horn/Whistle button. The whistle will sound for as long as you continue to depress the button. It will stop when you release the button.

Direction Your train is programmed to start in neutral. The train will always cycle neutral-forward-neutral-reverse with each press and release of the direction button. The engine is programmed to restart in neutral each time the track voltage is turned off for 25 seconds or more.

4



Manual Volume Control


To adjust the volume of all sounds made by this engine, turn the master volume control knob located next to the fuel tank clockwise to increase the volume and counter-clockwise to decrease the volume.




Figure 2: Manual Loco-Sound Volume Adjustment

Configuring For Display

It is possible to configure the powered unit for prototypical appearance when desiring to only display the model. Such a configuration can be accomplished by following the directions below to change the powered unit's trailing power truck guide wheel placement.





Loco-Sound Operating Instructions

Activating Proto-Sound 2.0 Conventional Mode Features

Loco-Sound features are activated by sequences of Bell and Horn button pushes described below. Please read the full descriptions of each feature before using it. To use these buttons to activate features rather than to blow the horn or ring the bell, you should tap the buttons very quickly with a ½-second pause between button presses. You may need to practice your timing to make this work smoothly.

| | Timing Chart | | | | | |
|---------|-------------------------------|---------|--------|---------|--|--|
| Press | ½ Sec. | Press | ½ Sec. | Press | | |
| Horn | Pause | Bell | Pause | Bell | | |
| Short & | | Short & | | Short & | | |
| Firm | | Firm | | Firm | | |
| | Total Time Lapse: 1 ½ Seconds | | | | | |

| Feature to Be Activated: | Button Code: |
|------------------------------|--------------------|
| Speed Control On/Off | 1 Whistle, 2 Bells |
| Lock into a Direction/Unlock | 1 Whistle, 3 Bells |

Speed Control

M.T.H. engines equipped with Loco-Sound have speed control capabilities that allow the engine to maintain a constant speed up and down grades and around curves, much like an automobile cruise control. You can add or drop cars on the run, and the engine will maintain the speed you set.

While the engine is programmed to start with the speed control feature activated, you can opt to turn it off. This means the engine's speed will fall as it labors up a hill and increase as it travels downward. It is also affected by the addition or releasing of cars while on the run. Because the engine will run more slowly at a given throttle voltage when speed control is on than when it is off, you should adjust the throttle to a lower power level for operation with speed control off to avoid high-speed derailments. When speed control is off, the volume will drop to allow for better low voltage operation.

To turn speed control on and off, put the engine in neutral, then quickly tap the transformer's Horn button one time then quickly tap the Bell button two times, allowing approximately ½ second to lapse between each quick button press. Two horn blasts will indicate that the engine has made the change. Repeat the 1 horn, 2 bells code to return it to the other condition. You will want to do this during the initial neutral upon start-up if you ever couple this engine to another engine that is not equipped with speed control to avoid damaging the motors in either engine. Each time you shut down the engine completely, it will automatically turn speed control on.



Locking Locomotive Into A Direction

You can lock your engine into a direction (forward, neutral, or reverse) so that it will not change directions. To do this, put the engine into the direction you want (or into neutral to lock it into neutral), run it at a very slow crawl (as slowly as it will move without halting), and quickly but firmly tap the Horn button once followed by three quick taps of the Bell button, allowing approximately ½ second to lapse between each quick button press. Two horn blasts will indicate that the engine has made the change. The engine will

not change direction (including going into neutral) until you repeat the 1 horn, 3 bells code to return the engine to its normal condition, even if the engine is kept without power for extended periods of time.



Using Proto-Cast and Proto-Dispatch Features

When used with the RailKing Remote Lock-on (sold separately), Loco-Sound-equipped engines gain Proto-Cast [™] and Proto-Dispatch [™] features.

Proto-Cast: This feature allows you to play audio recordings through your engine's speakers. You must supply the audio source (a small portable is sufficient) and a male-to-male mini cable (1/8" plug, like that used for the headset with a portable CD/tape player) to connect your audio source to the remote lock-on. To use Proto-Cast, simply plug the mini-cable into your audio source (usually into the headphone jack) and into the "Audio" port on the right side of the remote lock-on and adjust the volume.

Proto-Dispatch: This feature allows you to broadcast your own voice through your engine's speakers. You must supply the microphone and a mini cable (1/8" plug, like that used for the headset with a portable CD/tape player) to connect your microphone to the remote lock-on. To use Proto-Dispatch, simply plug the mini-cable into the microphone and into the "Mic" port on the left side of the remote lock-on and speak into the microphone.

When these features are in use, the locomotive's own sounds (engine sounds and bells, whistles, and horns) will be muted so that only the sounds you broadcast will be heard. Because these two features are voice activated, there will be a 10-15 second delay after you stop speaking into the microphone or turn off the audio source before the engine sounds resume. To stop using the feature and return to normal operation, unplug the cable from the lock-on jack.

If using parallel tracks with multiple Loco-Sound-equipped engines, Proto-Cast and Proto-Dispatch transmissions from one track may be picked up by the other nearby engines.

If you experience popping and interference, try cleaning the track with denatured alcohol as described in the "Cleaning the Wheels, Tires and Track" section of this booklet.

Maintenance

Lubricating and Greasing Instructions

The engine should be well oiled and greased in order to run properly.

Regularly lubricate all axles and linkage components and pickup rollers to prevent squeaking. Use light household oil, such as that found in M.T.H.'s maintenance kit. Do not over oil. Use only a drop or two on each pivot point.



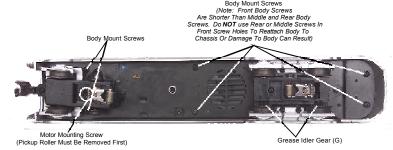


Figure 3

The locomotive's internal gearing was greased at the factory and should not need additional grease until after 50 hours of operation or one year, whichever comes first. Follow the greasing instructions below. Note that in some tightly packed engines you may need to move internal components temporarily in order to access the gears.

- 1. To access the gear box, remove the cab from the chassis by unscrewing the chassis screws as seen in Figure 3 and lifting the cab from the chassis.
- 2. Once the cab is removed, remove the trucks by unscrewing the black Phillips motor mount screw located on the underside of the drive trucks (see Fig. 7).
- 3. Once the motor mount screw has been removed, pull the motor away from the truck block and lightly coat the motor worm gear and bronze drive gear (in the truck block) with grease.
- 4. Reassemble the truck and motor, being careful not to pinch any wires between the truck block and motor mount.

5. After repeating the procedure for the other motor, reassmble the chassis and body, being careful that the wire harnesses are not caught between the chassis and body and reinstall the chassis screws.

Lubricate the outside truck block idler and drive gears with grease. Use the diagram shown in Figure 6 below as a guide and add grease to the points marked with a "G."





Figure 4

Cleaning The Wheels, Tires and Track

Periodically check the locomotive wheels and pickups for dirt and buildup, which can cause poor electrical contact and traction as well as prematurely wear out the neoprene traction tires.

Periodically check the locomotive wheels and pickups for dirt and buildup, which can cause poor electrical contact and traction and prematurely wear out the neoprene traction tires. Wheels and tires can be cleaned using denatured (not rubbing) alcohol applied with a cotton swab.

To clean the track, use RailKing Track Cleaning Fluid and a clean rag or denatured (not rubbing) alcohol. Unplug the transformer and wipe the rails of the track, turning the rag frequently to ensure that you are using clean cloth on the rails. Thereafter, keep an eye on the track and clean it



when it gets dirty to ensure good electrical contact and to lengthen the life of the tires.


Traction Tire Replacement Instructions

Your locomotive is equipped with two neoprene rubber traction tires on each powered truck block. While these tires are extremely durable, you may need to replace them at some point.

First, remove the truck sides from the truck block. To do this, turn your engine upside down. If there are visible Phillips screw heads between the truck frame and truck block (see Fig. 5), go to step A. If not, go to step B.

A. Remove the two Phillips screws that attach the truck sides to the truck block.

B. Remove the trucks from the chassis and the truck sides from the trucks in order to slip the new tire over the grooved drive wheel. See Fig. 5 for which screws you must remove to do this.



Once the truck sides have been removed:

- 1. Make sure the old tire has been completely removed from the groove in the drive wheel, using a razor blade or small flathead screwdriver to pry away any remains
- 2. Slip the new tire onto the wheel. You may find it useful to use two small flathead screwdrivers to stretch the tire over the wheel.
- 3. If you twist the tire while stretching it over the wheel, you will need to remove and reinstall the tire. Otherwise your engine will wobble while operating.
- 4. Make sure the tire is fully seated inside the groove. Use a razor blade to trim away any excess tire that will not seat inside the groove properly.
- 5. Reassemble in the reverse order.

One set of replacement tires is packaged with your model. Additional sets are available directly from the M.T.H. Parts Department (phone: 410-381-2580; e-mail: parts@mth-railking.com; mail: 7020 Columbia Gateway Drive, Columbia MD 21046-1532).

Headlight Replacement Instructions

The locomotive's headlight is controlled by a constant voltage circuit in the engine. The headlight is easy to remove and replace when it burns out. The bulb has a quick disconnect plug that attaches the bulb harness to a light circuit. Replacement bulbs are available directly from the M.T.H. Parts Department.

Follow the body removal instructions found in the Lubrication and Greasing Instructions.

Gently disconnect the bulb harness from the socket on the constant voltage circuit and replace the bulb.




Figure 6

Troubleshooting Loco-Sound Problems

Although Loco-Sound has been designed and engineered for ease of use, you may have some questions during initial operation. The following table should answer most questions. If your problem cannot be resolved with this table, contact M.T.H. for assistance (telephone: 410-381-2580; fax: 410-423-0009; service@mth-railking.com, 7020 Columbia Gateway Drive, Columbia MD 21046-1532).

| Starting Up | Remedy |
|---|---|
| When I first turn the power on, the engine will not begin to run. I have to turn the throttle off and then on again to get the engine to operate. | This is normal behavior. To prevent accidental high-speed start-ups, Loco-Sound is programmed to start up in neutral anytime track power has been turned off for several seconds. See the "Basic Operation" section for more details. |
| Horn | Remedy |
| I can't get the horn to blow when I press the whistle button. | You may be pressing the button too quickly. Try pressing the whistle button more slowly, taking approximately one full second to fully depress the button. |
| Bell | Remedy |
| I can't get the bell to ring when I press the bell button. | You may be pressing the button too quickly. Try pressing the bell button more slowly, taking approximately one full second to fully depress the button. |
| Lock-out | Remedy |
| I can't get the engine to run after I power up the transformer. It sits still with the engine sounds running. | The engine is locked into the neutral position. Follow the procedure in the "Lock into a Direction" section. |
| The engine won't lock into forward, neutral, or reverse. | Engine speed must be below 10 scale mph (approx. 10 volts or less in conventional mode). |

| Volume | Remedy |
|--|--|
| The sounds seem distorted, especially when the whistle or bell is activated. | Loco-Sound volume is set too high. Turn the volume control knob on the bottom of the chassis counter- clockwise to reduce the volume. |

Transformer Compatibility and Wiring Chart

Loco-Sound is designed to work with most standard AC transformers. The chart below lists the many compatible transformers. Note that many of the operational commands described in these instructions require a bell button, so if your transformer does not have its own bell button, you should consider adding one to get the full benefit of the system. In addition, the chart details how the terminals on these transformers should be attached to your layout.

| Transformer | Center Rail | Outside Rail | Min/Max. | Power | Transformer |
|---|---------------------------|--------------------------|----------|--------------|-------------|
| Model | | | Voltage | Rating | Туре |
| MTH Z-500 | Red Terminal | Black Terminal | 0-18v | 50-Watt | Electronic |
| MTH Z-750 | Red Terminal | Black Terminal | 0-21v | 75-Watt | Electronic |
| MTH Z-4000 | Red Terminal | Black Terminal | 0-22v | 390-Watt | Electronic |
| Lionel 1032 | U | Α | 5-16v | 90-Watt | Standard |
| Lionel 1032M | U | Α | 5-16v | 90-Watt | Standard |
| Lionel 1033 | U | Α | 5-16v | 90-Watt | Standard |
| Lionel 1043 | U | A | 5-16v | 90-Watt | Standard |
| Lionel 1043M | U | Α | 5-16v | 90-Watt | Standard |
| Lionel 1044 | U | Α | 5-16v | 90-Watt | Standard |
| Lionel 1053 | U | Α | 8-17v | 60-Watt | Standard |
| Lionel 1063 | U | Α | 8-17v | 60-Watt | Standard |
| All-Trol | Left Terminal | Right Terminal | 0-24v | 300-Watt | Electronic |
| Dallee Hostler | Left Terminal | Right Terminal | | | Electronic |
| Lionel LW | Α | U | 8-18v | 75-Watt | Standard |
| Lionel KW | A or B | U | 6-20v | 190-Watt | Standard |
| Lionel MW | Outside Track Terminal | Inside Track Terminal | 5-16v | 50V.A. | Electronic |
| Li onel RS-1 | Red Terminal | Black Terminal | 0-18v | 50V.A. | Electronic |
| Lionel RW | U | Α | 9-19v | 110-Watt | Standard |
| Lionel SW | U | Α | Unknown | 130-Watt | Standard |
| Lionel TW | U | Α | 8-18v | 175-Watt | Standard |
| Lionel ZW | A,B,C or D | U | 8-20v | 275-Watt | Standard |
| Lionel Post-War Celebration Series ZW | A,B,C or D | Common | 0-20v | 135/190 Watt | Electronic |

^{*} Conventional Mode Only

Service & Warranty Information

How to Get Service Under the Terms of the Limited One-Year Warranty

For warranty repair, follow the instructions below to obtain warranty service.

First, e-mail, write, call or fax an Authorized M.T.H. Service Center in your area or M.T.H. Electric Trains to obtain Repair Authorization. You can find the list of Authorized Service Centers on the M.T.H. website, www.mth-railking.com. Authorized Service Centers are required only to make warranty repairs on items sold from that store; all other repairs may or may not be done at the store's own discretion. Otherwise, contact M.T.H. (fill out the Service Contact form in the Service Section of www.mth-railking.com; send US mail to the address listed below; tel: 410-381-2580; fax: 410-423-0009), stating when the item was purchased and describing the problem. If you contact M.T.H., you will be given a return authorization number to assure that your merchandise will be properly handled upon its receipt.

CAUTION: Make sure the product is packed in its original factory packaging including its foam and plastic wrapping material so as to prevent damage to the merchandise. The shipment must be prepaid and we recommend that it be insured. A cover letter including your name, address, daytime phone number, e-mail address (if available), Return Authorization number, a copy of your sales receipt and a full description of the problem must be included to facilitate the repairs. Please include the description regardless of whether you discussed the problem with a service technician when contacting the Service Center or M.T.H. for your Return Authorization.

Please make sure you have followed the instructions carefully before returning any merchandise for service.

Limited One-Year Warranty

All M.T.H. products purchased from an Authorized M.T.H. Train Merchant are covered by this warranty.

See our website atwww.mth-railking.com or call 1-888-640-3700 to identify an Authorized M.T.H. Train Merchant near you

M.T.H. products are warrantied for one year from the date of purchase against defects in material or workmanship, excluding wear items such as light bulbs, pick-up rollers, batteries, smoke unit wicks, and traction tires. We will repair or replace (at our option) the defective part without charge for the parts or labor, if the item is returned to an Authorized M.T.H. Service Center or M.T.H. Electric Trains within one year of the original date of purchase. This warranty does not cover damages caused by improper care, handling, or use. Transportation costs incurred by the customer are not covered under this warranty.

Items sent for repair must be accompanied by a return authorization number, a description of the problem, and a copy of the original sales receipt from an Authorized M.T.H. Train Merchant, which gives the date of purchase. If you are sending the item to M.T.H., fill out the Service Contact form in the Service Section of www.mth-railking.com; send US mail to the address listed below; call 410-381-2580, or fax 410-423-0009 to obtain a return authorization number. If you are sending this product to an Authorized Service Center, contact that Center for their return authorization.

This warranty gives you specific legal rights, and you may have other rights that vary from state to state.

Service Department M.T.H. Electric Trains 7020 Columbia Gateway Drive Columbia MD 21046-1532



PARTICIPATING RETAILER LIST

ALABAMA SOUTHERLAND STATION HUNTSVILLE 256-533-4720 railway@bellsouth.net

ARIZONA

ARIZONA TRAIN DEPOT MESA 480-833-9486 sales@arizonatraindepot.com www.arizonatraindepot.com/

CALIFORNIA
DOLLHOUSES, TRAINS & MORE NOVATO 415-883-0388 kbecker@cmc.net

TIN PLATE JUNCTION OAKLAND 510-444-4780 TOYTRAINS@email.msn.com

COLORADO

MIZELL TRAINS Inc WESTMINSTER 303-429-4811 mizelltrains@cs.com www.mizelltrains.com

CONNECTICUT SHELTON RAILROAD SYSTEMS SHELTON 203-924-8761 adriani@clearlight.com NEW ENGLAND HOBBY SUPPLY MANCHESTER 860-646-0610 bobbell@nehobby.com

DELAWARE KRRB MODEL TRAINS INC. NEWARK 302-292-2779 info@krrb.com www.krrb.com

FLORIDA DEPOT HOBBY SHOP LAKE WORTH 561-585-1982 jimmyt1982@aol.com www.depothobbies.com

COLONIAL PHOTO & HOBBY ORLANDO 407-841-1485 trains@colonialphotoandhobby.com

WARRICK CUSTOM HOBBIES PLANTATION 954-370-0708 info@warrickcustomhobbies.com www.warrickcustomhobbies.com

FRANK'S TRAINS & HOBBIES INC. OLDSMAR 813-855-1041 FTH@allhobbies.com www.allhobbies.com

READY TO ROLL MIAMI 305-688-8868 rtrtrains@aol.com www.readytorolltrains.com

ILLINOIS BIKE & CHOO CHOO CONNECTION SCHAUMBURG 847-882-7728 trainconnection@aol.com

INDIANA Y. O. R. K. TRAINS MUNSTER 219-838-9999 yorktrains@aol.com

SAMUELSON'S TRAIN SHOP VALPARAISO 219-462-2708

LOUISIANA AMERICA'S TRAIN YARD BATON ROUGE 225-926-5592

MAINE
WHEELS, WINGS & THINGS
LUDLOW
207-532-6277 irc44@javanet.com

MARYLAND

ENGINE HOUSE HOBBIES GAITHERSBURG 301-590-0816 luciecerise@aol.com

J&BTRAINS HAGERSTOWN 240-420-4930

HOBBYTOWN USA FREDERICK 301-694-7395

PURKEY'S TOY TRAINS SYKESVILLE 410-549-6061 wiley@oldmainline.com

THE TRAIN ROOM HAGERSTOWN 301-745-6681

MASSACHUSETTS NORTHEASTTRAINS

PEABODY 978-532-1615 www.netrains.com

MICHIGAN

BRASSEUR ELECTRIC TRAINS INC. SAGINAW 517-793-4753 bob@traindoctor.com

MISSOURI SWITCH STAND SAINT LOUIS 314-781-4458 r41877@earthlink.com

MARK TWAIN HOBBY CENTER ST. CHARLES 636-946-2816 webmaster@hobby1.com www.hobby1.com

NEW HAMPSHIRE TREASURED TOYS SALEM 603-898-7224 ttoys@treasured-toys.com www.treasured-toys.com

RAILROAD SPECIALTIES HUDSON 603-882-5566 crew@electric-trains.com www.electric-trains.com

NEW JERSEY TRAINS & THINGS TRENTON 609-883-8790 trainsanthings@aol.com

GRAND CENTRAL STATION KEARNY 201-955-6200 228gene@gateway.com

HOBBYMASTERS, INC RED BANK 732-842-6020

hobbymasters@hobbymasters.com

HOLLY BEACH TRAIN DEPOT WILDWOOD 609-522-2379 larry@pro-usa.net

COAST TRAINS AND COLLECTIBLES WALL 732-556-9005 coasttrain@aol.com www.coasttrains.com

J & B TRAINS, INC. MAPLE SHADE 856-414-0092 BASE1130@aol.com

HOBBY SHOP MATAWAN 732-583-0505 hobbyshopnj.com

ATLANTIC RAILS HAMMONTON 609-567-8490 bobcap@pics.com www.atlanticrails.com COUNTRY AND STUFF ANDOVER 973-786-7086 stuff@crystal.palace.net

RIDGEFIELD HOBBY RIDGEFIELD 201-943-2636

COLUMBUS TRAIN STATION COLUMBUS 609-518-1800

NEW YORK AURORA RAILS & HOBBIES EAST AURORA 716-652-5718 rk82141@aol.com

AMERICANA STORE TIVOLI 845-757-4246 mthdepot@valstar.net

NASSAU HOBBY CENTER, INC. FREEPORT 516-378-9594 Charlienassau@aol.com

KROSS HARDWARE WEST BABYLON 631-669-3069 t989@aol.com

CITY DEPOT, INC. NEW HAMPTON 845-374-3010 citydepot@frontiernet.net www.citydepot.com

NORTH CAROLINA
DRY BRIDGE STATION
MOUNT AIRY
336 786 9811

336-786-9811 mikek@drybridgestation.com www.drybridgestation.com

THE FREIGHT YARD SMITHFIELD 919-934-6229 disbissette@aol.com

TRAINS LTD. CHARLOTTE 704-566-9070 modelrrs@bellsouth.net www.trainsltd.com

THE ROUNDHOUSE & BACKSHOP CARY 919-465-0810

OHIO
DIXIE UNION STATION
MASON
513-459-0460
rockylane@core.net
www.dixieunionstation.com

RICK'S TOY TRAINS TOLEDO 419-478-0171

T & K HOBBY SHOP BRIDGEPORT 740-633-6607 salea@tkhobbies.com www.tkhobbies.com

TRAINS-N- THINGS CANTON 330-499-1666 trains@sssnet.com

PARMA HOBBY CLEVELAND 216-741-6440 info@parmahobby.com

GLEN'S TRAIN SHOP AKRON 330-253-6527

E & S TRAINS AKRON 330-745-0785

GRAND PACIFIC JUNCTION OLMSTEAD FALLS 440-235-4777 gpjmrr@juno.com HUDSON TOY, TRAIN & HOBBY HUDSON

HUDSON 330-653-2997 ejpickens@aol.com

DAVIS ELECTRONICS MILFORD 513-831-6425 davistrains@fuse.net www.davistrains.com

SANDY'S HOBBY'S & COLLECTIBLES ELYRIA 440-365-9999 sandyshobb@aol.com

ERIE RAILWAY DEPOT TROY 937-440-9972 orvile@gte.net

CLEARVIEW TRAIN & HOBBY LORAIN 440-277-4488 klogar@erienet.net www.clearviewtrainandhobby.com

PENNSYLVANIA
FAIRCHANCE PHARMACY
FAIRCHANCE
724-564-7817
mthdealer@aol.com
www.hhs.net/fairchance

THE STATION
NEW CUMBERLAND
717-774-7096
station@paonline.com
BUSSINGER TRAINS
AMBLER
215-628-2366
choochoss@icdc.com
www.icdc.com/-btrains

CHARLEROI SWEEPER CENTER CHARLEROI 724-483-3397

AMERICAN HOBBY CENTER ALIQUIPPA 724-378-3930 american@icubed.com

CRANBERRY HOBBY DEPOT CRANBERRY TWP 724-776-3640 JAdams6113@aol.com

ALLENTOWN TOY TRAIN SERVICE ALLENTOWN 610-821-0740

ON THE RIGHT TRACK ALTOONA 814-942-4345

JIM'S TRAIN SHOP HOMER CITY 724-479-2026 sudsy@stargate.net

YE OLDE TRAIN & CHRISTMAS SHOPPE BOYERTOWN 610-369-0755 www.yeoldetrain.com

TOBY TYLER'S HOBBY CENTER PITTSBURGH 412-653-5030 tobytyler111@cs.com

BUSTLETON TRAIN SHOP PHILADELPHIA 215-698-7266

CHESTNUT TOYBOX PHILADELPHIA 215-545-0455 chestnuttoy@earthlink.net

THE CABOOSE LEHIGHTON 570-386-5352 www.thecaboosehobbies.com victen@ptd.net

SOUTH CAROLINA EMERALD TRAIN & HOBBY GREENWOOD 864-223-2247 TENNESSEE

MODEL RAILROAD & HOBBY SHOP MEMPHIS 901-384-6500 mrhs99@earthlink.net www.modelrailroadandhobby.com

TEXAS HOBBY TIME AMARILLO 806.352.9660 don.l.harris.@hobby-time.com

VIRGINIA TRAIN DEPOT MANASSAS 703-335-2216

NORGE STATION WILLIAMSBURG 757-564-7623 norgetrains@cs.com

NUTBUSH EXPRESS VICTORIA 804-696-1902 thenutbushexp@meckcom.net

TOY TRAIN CENTER RICHMOND 804-288-4475

T S G HOBBIES

WARRENTON 540-347-9212 tripi@mnsinc.com www.mnsinc.com/tripi/tsg.htm

CHESTERFIELD HOBBIES MIDLOTHIAN 804-379-9091 chsthobb@erols.com www.chesterfieldhobbies.com

DAVIS HOBBY SUPPLIES PORTSMOUTH 757-397-1983 ralph@davishobby.com www.davishobby.com

LOCUST GROVE TRAINS LOCUST GROVE 540-854-8955 Igtrains@aol.com www.locustgrovetrains.com

WEST VIRGINIA
PATRICK'S TRAINS
WHEELING
304-232-0714
trains@patstrains.com
www.patstrains.com

WISCONSIN SOMMERFELD'S TRAINS

BUTLER 262-783-7797 questions@sommerfelds.com www.sommerfelds.com

G B T V & TRAINS GREEN BAY 920-496-9697 rrtycoon@netnet.net

GRAMPA'S TRAIN SHOP RICE LAKE 715-234-2996 grampastrainshop@yahoo.com

THE TRAIN STORE WAUKESHA 262-650-6675

HOBBY OUTLET FOND DU LAC 920-924-3770 hobby_outlet@hotmail.com

CANADA ONTARIO

CREDIT VALLEY RAILWAY COMPANY STREETSVILLE 905-826-1306 CVRCO@globalserve.net www.cvrco.com

TOY TRAIN WORKSHOP CUMBERLAND 613-833-3125 info@toytrainworkshop.com www.toytrainworkshop.com

THE TRAIN ROOM FERGUS 519-787-3280